






S6000K

SPILLSEAL® Protected Washable to IP66/NEMA4X



Dishwasher Safe

Quick and easy to clean with dishwasher detergent on all cool wash dishwasher cycles.

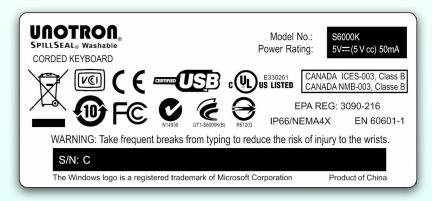

Full International Accreditations

The S6000K is fully accredited to these international standards and the Medical Device Directive IEC EN 60601-1

For further information, please contact: +44 (0) 203 474 0234 sales@keyboardspecialists.co.uk

S6000K Medical Grade Washable Antibacterial Keyboard

SpillSeal® protected water and dustproof keyboard to NEMA4X and IP66, meaning you can wash and disinfect the keyboard in Hospital grade cleaning solutions, helping reduce the spread of germs and cross infection.

The keyboard can be used with confidence in many different environments such as Healthcare, Education, Military, Commercial and is rugged and durable and built for harsh environments.

FEATURES

Washable and Waterproof to IP66 & NEMA4X

Sealed Keys lets you wash and fully clean the keyboard.

Hermetic Air-tight Design

Hermetically sealed interior prevents any fluids or matter entering, protecting the electronics and excluding any possible contamination.

Antibacterial Protection

Is incorporated in the plastic providing a powerful broad-spectrum inorganic, silver-based biocide for antibacterial protection.

Easy to Disinfect

Immerse in antibacterial solutions to reduce the spread of germs.

Touch Typing Keystroke

All UNOTRON keyboards have a responsive touch typing experience without the stiffness of traditional rubber keyboards.

Detachable Wrist Support

Ergonomic wrist support adds comfort for extended use and is easily removed when not required.

Easy Installation

Plug and Play for Windows 98/ME/2000/XP/Vista/Windows 7 and Mac with no extra software or complicated set up.

SPILLSEAL® Washable Antibacterial Keyboard - \$6000K

Water and Dust Resistance	IP66 / NEMA4X
Antibacterial Protection	Silver-based Antibacterial Additive
Key Layout	104 (US) and 105 (EU)
Legend Type	Laser Etched
Internet / Multimedia Hotkeys	0
Languages Available	US, UK, European (ask for details)
OS Compatibility	Windows 98, Me, 2000, XP, Vista, and Mac
Connection Type	USB 1.1, PS2 with Adapter
Cable Length	2M
Power	30mA
Key Switch Type	Membrane with tactile feedback
Key Operating Force	65+/-10 gm
Contact Bounce	15 ms (max)
Actuation Life	20 Million Cycles
Key Travel	3.8+/-0.3
Кеу Туре	Full Travel - Ergonomic Form
Certifications	FCC, CE, IP66, NEMA4X, RoHS, WEEE

Unit Dimensions

Length (mm)	450
Width (mm)	170
Height (mm)	32
Weight	803gms

Unit Pack

Width (mm)	491
Depth (mm)	295
Height (mm)	65
Unit Pack Weight	1.22KG

Outer Carton

Outer Carton Quantity	10
Width (mm)	375
Depth (mm)	510
Height (mm)	460
Outer Carton Weight	14.5KG

Pallet Information

Pallet Quantity	180
Width (mm)	1200
Depth (mm)	1000
Height (mm)	1530
Pallet Weight	261KG

Environment

Operation Temperature	0~60 C
Humidity	0~95 % RH
Storage Temperature	-40~70 C